

TOTO®

MS854114E(G) / MS853113E Eco UltraMax® One Piece Toilet, 1.28 GPF




MS854114E(G) / MS853113E - Eco UltraMax® Toilet with SoftClose® Seat



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Complete with SoftClose® toilet seat, or upgrade to a Washlet®.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Sleek, high profile one piece design
- Wide, 2¹/₈" computer designed trapway
- E-Max® Technology
- Large water surface

High profile one piece toilet. Low consumption (1.28Gpf/4.8Lpf) siphon jet flushing action.

Tank cover, fittings, polished chrome trip lever, and SoftClose® seat included.

■ **MS854114EG**
Elongated toilet with SoftClose® seat
With Sanagloss ceramic glaze
(Available in: #01)

■ **MS854114E**
Elongated toilet with SoftClose® seat

■ **MS853113E**
Round toilet with SoftClose® seat

Colors:

Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone

Trip Lever:

Standard #CP Chrome Plated

Optional See price book for additional finishes

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

MS854114E(G) / MS853113E

Eco UltraMax® One Piece Toilet, 1.28 GPF

PERFORMANCE

The TOTO® E-Max® low consumption one piece toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large water surface and a 100% glazed trapway.

SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf
 Flush System: Gravity Feed
(E-Max® Technology)

Min. Water Pressure:
 8psi (Static)

Water Surface: 10" x 8"

Trap Dia.: 2-1/8"

Rough-in: 12"

Trap Seal: 2-3/8"

Warranty: One Year Limited Warranty

Material: Vitreous China

Shipping Weight: **MS854114E(G)** 89 lbs.
MS853113E 89 lbs.
(Includes Soft Close Seat)

Shipping Dimensions:


MS854114E(G) / MS853113E
 30³/₄" L x 18¹/₈" W x 27¹/₈" H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/c-UPC, CSA, City of Los Angeles, State of Massachusetts, and others.

These dimensions and specifications are subject to change without notice.

U.S. Patent: D379.496 D406.329
 5.850.639 5.918.325

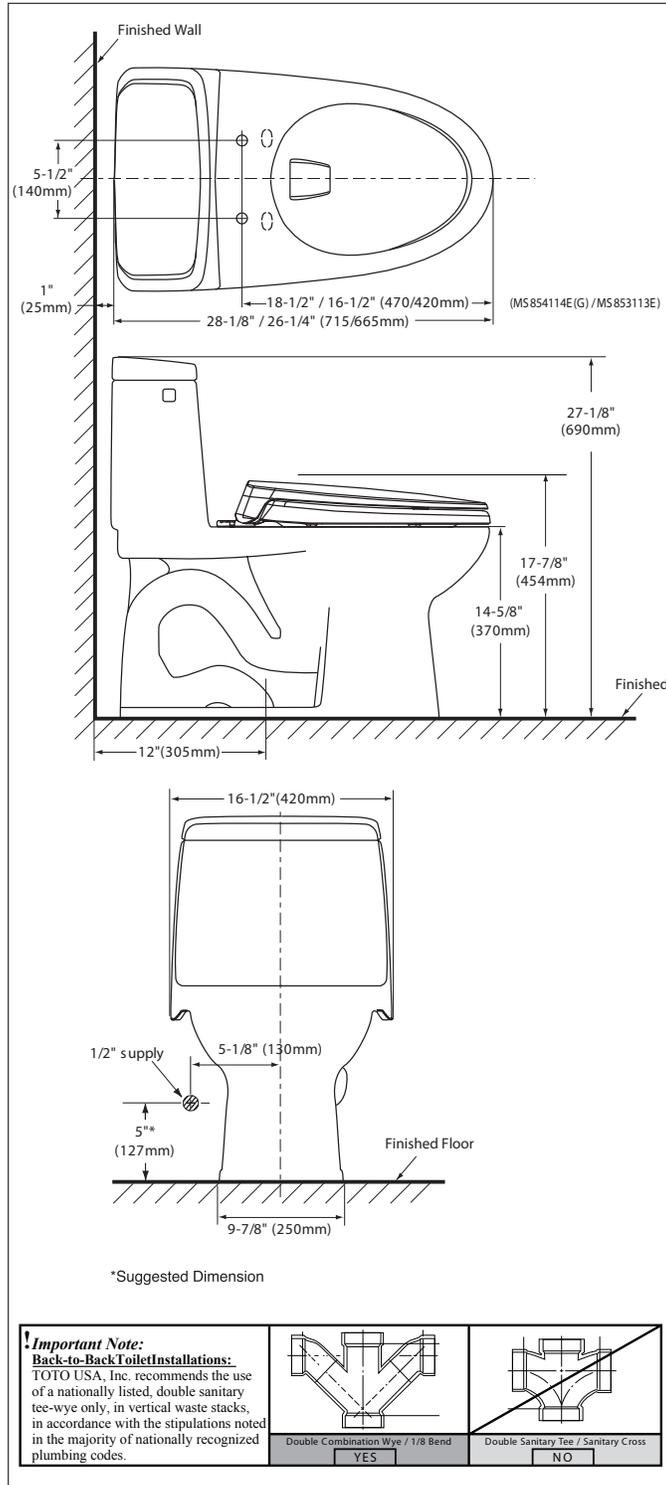

MS854114E(G) / MS853113E - Eco UltraMax® Toilet with SoftClose® Seat

TOTO®

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com

Printed in U.S.A. © TOTO LTD. 03/07 #A10370

Printed on recycled paper